




Cyclogym

Technical specification

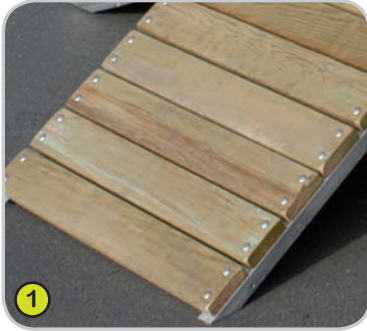

1- **The surface** is made of solid wood with autoclave treatment, 145x46mm.




2- **The frames** are made of galvanised steel.



3- **The posts** (for signs) are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi, insects and termites.

The posts are protected by injected polyamide caps.

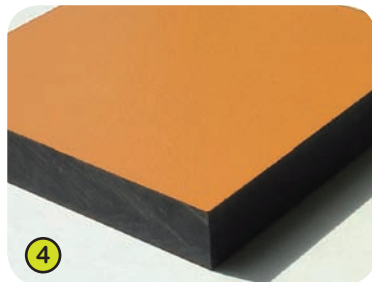

4- **Signs** are made with a compact material 13mm thick. It is made up of 70% of softwood fibres and 30% of thermosetting resin, and it stands up to weathering very well (sun, rain, damp, etc.). The coloured surfaces are treated with products based on coloured acrylic polyurethane resins; this enables them to stand up well to UV radiation and resist damage.



5- **The stainless steel fixings** are protected by polyamide anti-vandalism caps.