




The Amazon Village Technical Specification

J47200-P

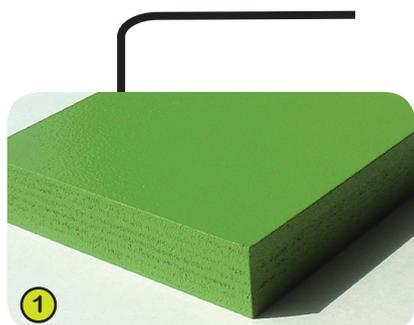

1- **The lacquered panels** are made from very high quality plywood 22mm thick. Made of alternate layers of thin birch, which offers longevity and an exceptional mechanical strength. The colours are applied by electrostatic spraying of two-component polyurethane lacquer that is free of heavy metals, to ensure high levels of resistance to potentially aggressive chemicals such as anti-graffiti cleaning products.



2- **The 125mm round posts** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi, insects and termites. The caps are made of injection moulded polyamide.



3- **The central posts**, which measure 95 x 95 mm, are made of galvanised, lacquered steel. The two-tone grey graining finish has a slightly undulating surface for increased scratch resistance. The caps are made of injection moulded polyamide.



4- **The platforms and the climbing wall** are made from a 12.5mm thick, textured, non-slip compact material (HPL).



5- **The climbing holds** are made of injected polyamide, combining rigidity and sturdiness.



6- **The tubular slide** is made of rotary moulded polyethylene.



7- **The tubes** are made of stainless steel, diameter 40mm, guaranteeing lasting durability and reliability of the equipment.

8- **The "Kayak" slide** is made of rotary moulded polyethylene.

9- **The stainless steel fixings** are protected by polyamide anti-vandalism caps.

